



The First Name In Trailers®

## 20K High Wear Floor System

Built to withstand today's demanding applications

Engineered for strength and durability, Utility's patented designed heavy duty floor system has earned a reputation of unmatched dependability. Utility's 3000R® has the highest rated standard floor system with a 16,000 lb. dynamic fork truck capacity heavy duty aluminum duct floor. But for those applications that demand more, Utility's engineers designed an optional floor system that can stand up to some of today's toughest loading devices.

Some loading devices can cause premature wear down and fatigue to the floor, so a 20K flooring is required and is often spec'd with closer crossmembers for structural support.

The 20K High Wear Floor System features a 20,000 lb fork truck capacity on standard 12" centerline crossmembers to provide a light weight, lower cost 20K floor system. The aluminum duct floor planks also has 30%

more wear thickness than the standard reefer duct floor, delivering optimal performance and increasing service life of the floor.


As with all 3000R floor systems, this high wear floor system features full length 100% hardwood fillers to provide a stronger, longer lasting, moisture and rot resistant floor.



# HEAVY-DUTY FEATURES



The First Name In Trailers®

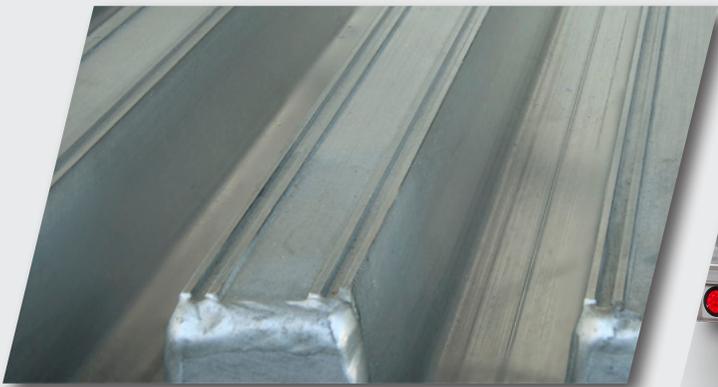

## Heavy-Duty Aluminum Duct Floor

Patented floor system with full-length hardwood floor fillers, I-beam floor cores and its rear "grid" system give support for optimum performance



## High Payload Floor System

20,000 lb dynamic fork truck capacity with 12" front fork truck tire width.




## Lighter Weight Solution

The 20K High Wear Floor system provides a light weight, lower cost option without other structural enhancements. With standard 12" centerline crossmembers, this floor option is more than 300 lbs lighter than a 20,000 lb floor system requiring 10" centerline crossmembers.

## Extended Wear Floor

30% more upper wear thickness than the standard duct floor extending service life of floor.

30% thicker wear surface

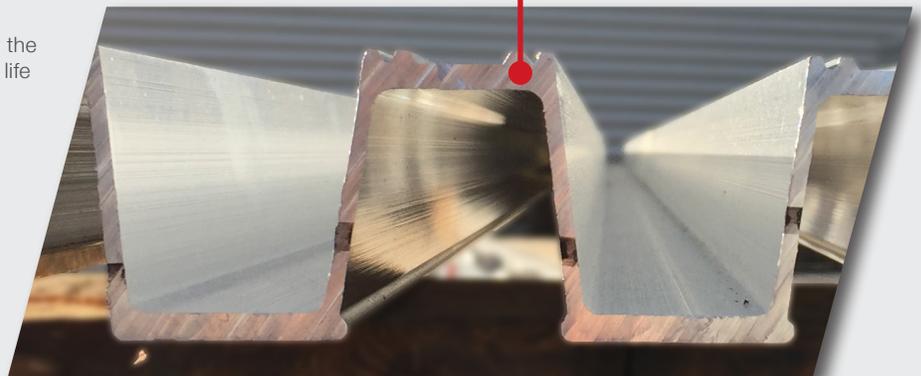

\* Specifications, data, and images are subject to change without notice.



© 2018 Utility Trailer Manufacturing Co., 17295 Railroad St, City of Industry, CA 91748

[www.utilitytrailer.com](http://www.utilitytrailer.com)